




PGA (MPLED)

MONTAGE
HANDLEIDING

MONTAGE
ANLEITUNG

MOUNTING
INSTRUCTION

INSTRUCTION DE
MONTAGE

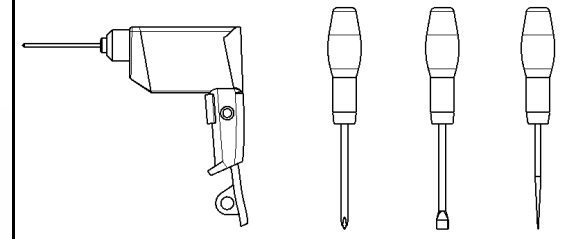

KK M4

stitching awl



IP66

UITVOERING PGA

Continu-verlichting

MPLED 3000K 2200lm (typical)

MPLED 4000K 2200lm (typical)

MPLED 3000K 4400lm (typical)

MPLED 4000K 4400lm (typical)

Decentrale nood/continu verlichting / Emergency-continuous

MPLED 3000K 2200lm (typical) + emergency-continuous

MPLED 4000K 2200lm (typical) + emergency-continuous

MPLED 3000K 4400lm (typical) + emergency-continuous

MPLED 4000K 4400lm (typical) + emergency-continuous





Revisedatum: 6-03-2014, versie3.0

LIGHTRONICS B.V.


Spuiweg 19
5145 NE Waalwijk
Postbus 150
5140 AD Waalwijk
The Netherlands

tel: +31(0)416 568 600
fax: +31(0)416 568 601
info@lightronics.nl
www.lightronics.nl

1

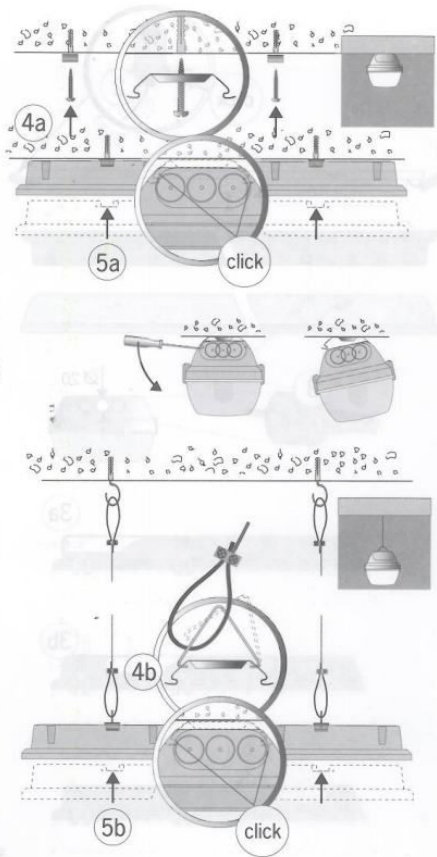



2



3



4




Schakeldraad


Stan-

5

Emergency: connect the batteries

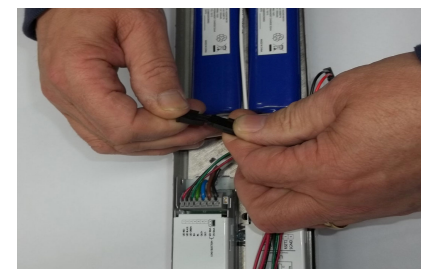

6



Place unit in housing

